

STAMFORD®


S9H1D-C4 Wdg.63 - Technical Data Sheet

Standards

STAMFORD industrial alternators meet the requirements of the relevant parts of the IEC 60034 and the relevant sections of other international standards such as BS5000-3, ISO 8528-3, VDE 0530, NEMA MG1-32, CSA C22.2-100 and AS 60034. Other standards and certifications can be considered on request.

Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.

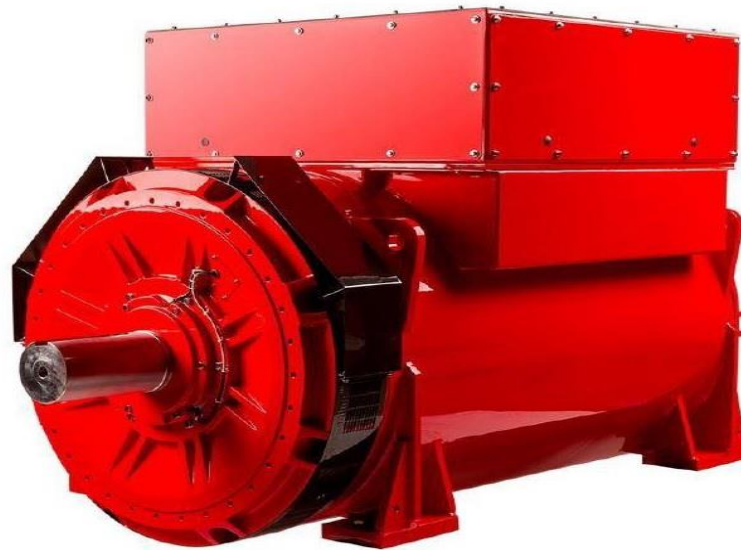

Excitation and Voltage Regulators

Excitation System					
AVR Type	DM110	DECS100	DECS150		
Voltage Regulation	± 0.25%	± 0.25%	± 0.25%		with 4% Engine Governing
AVR Power	PMG	PMG	PMG		

No Load Excitation Voltage (V)	11 - 10.3
No Load Excitation Current (A)	1 - 0.94
Full Load Excitation Voltage (V)	41.7
Full Load Excitation Current (A)	3.8
Exciter Time Constant (seconds)	0.34

STAMFORD®

S9H1D-C4 Wdg.63

Electrical Data		
Insulation System	H	
Stator Winding	Double Layer Lap	
Winding Pitch	5/6	
Winding Leads	6	
Winding Number	63	
Number of Poles	4	
IP Rating	IP23	
RFI Suppression	BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. Refer to factory for others	
Waveform Distortion	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%	
Short Circuit Ratio	1/Xd	
Steady State X/R Ratio	34.25	
	50 Hz	60 Hz
Telephone Interference	THF<2%	TIF<50
Cooling Air Flow	2.78 m³/sec	3.33 m³/sec
Voltage Series Star (V)	5500	6600
Voltage Parallel Star (V)	-	-
Voltage Delta (V)	-	-
kVA Base Rating (Class H) for Reactance Values (kVA)	2520	3140
Saturated Values in Per Unit at Base Ratings and Voltages		
Xd Dir. Axis Synchronous	2.460	2.554
X'd Dir. Axis Transient	0.197	0.205
X''d Dir. Axis Subtransient	0.153	0.159
Xq Quad. Axis Reactance	1.215	1.262
X''q Quad. Axis Subtransient	0.239	0.248
XL Stator Leakage Reactance	0.118	0.122
X2 Negative Sequence Reactance	0.201	0.209
X0 Zero Sequence Reactance	0.090	0.093
Unsaturated Values in Per Unit at Base Ratings and Voltages		
Xd Dir. Axis Synchronous	2.952	3.065
X'd Dir. Axis Transient	0.227	0.235
X''d Dir. Axis Subtransient	0.179	0.186
Xq Quad. Axis Reactance	1.251	1.299
X''q Quad. Axis Subtransient	0.287	0.298
XL Stator Leakage Reactance	0.133	0.138
Xlr Rotor Leakage Reactance	0.248	0.258
X2 Negative Sequence Reactance	0.241	0.250
X0 Zero Sequence Reactance	0.105	0.109

STAMFORD

S9H1D-C4 Wdg.63


Time Constants (Seconds)		
T'd Transient Time Const.		0.228
T''d Sub-Transient Time Const.		0.020
T'do O.C. Field Time Const.		2.510
Ta Armature Time Const.		0.079
T''q Sub-Transient Time Const.		0.0230
Resistances in Ohms (Ω) at 22°C		
Stator Winding Resistance (Ra), per phase for series connected		0.1080
Rotor Winding Resistance (Rf)		0.53
Exciter Stator Winding Resistance		9.8
Exciter Rotor Winding Resistance per phase		0.014
PMG Phase Resistance (Rpmg) per phase		3.8
Positive Sequence Resistance (R1)		0.1350
Negative Sequence Resistance (R2)		0.1555
Zero Sequence Resistance (R0)		0.1350
Saturation Factors	5500V	6600V
SG1.0	0.163	0.165
SG1.2	0.738	0.741
Mechanical Data		
Shaft and Keys	All alternator rotors are dynamically balanced to better than ISO 21940-11 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.	
	1 Bearing	2 Bearing
SAE Adaptor	0, 00	0, 00, None
Moment of Inertia	80.2 kgm ²	76.8 kgm ²
Weight Wound Stator	1787kg	1787kg
Weight Wound Rotor	1908kg	1809kg
Weight Complete Alternator	5250kg	5200kg
Shipping weight in a Crate	5600kg	5550kg
Packing Crate Size	260 x 200 x 220(cm)	260 x 200 x 220(cm)
Maximum Over Speed	2250 RPM for two minutes	
Bearing Drive End	-	6232
Bearing Non-Drive End	6324	6324

STAMFORD®


S9H1D-C4 Wdg.63

THREE PHASE EFFICIENCY CURVES

50Hz

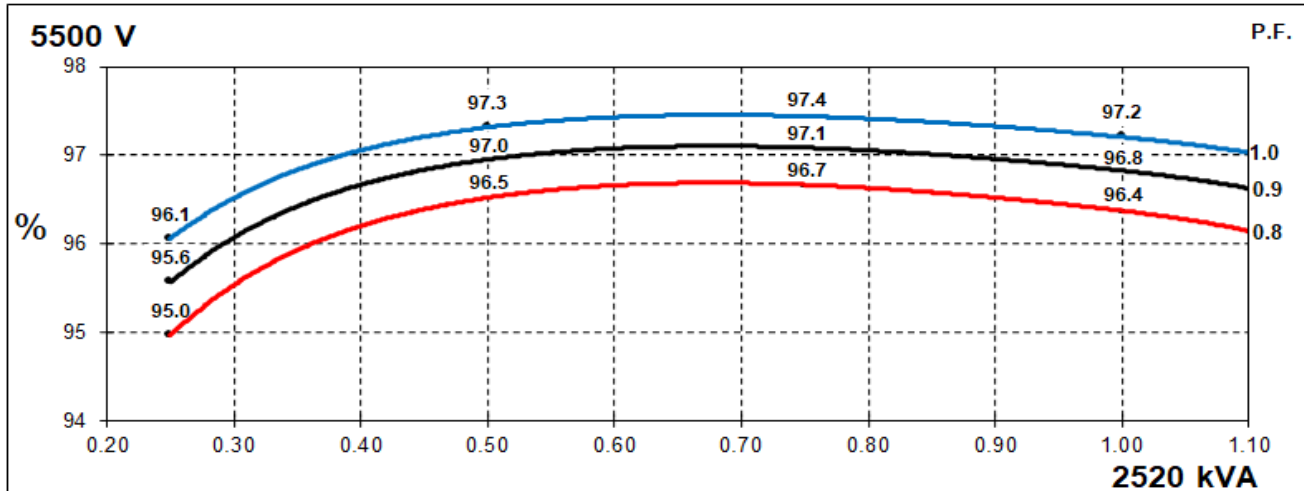

60Hz

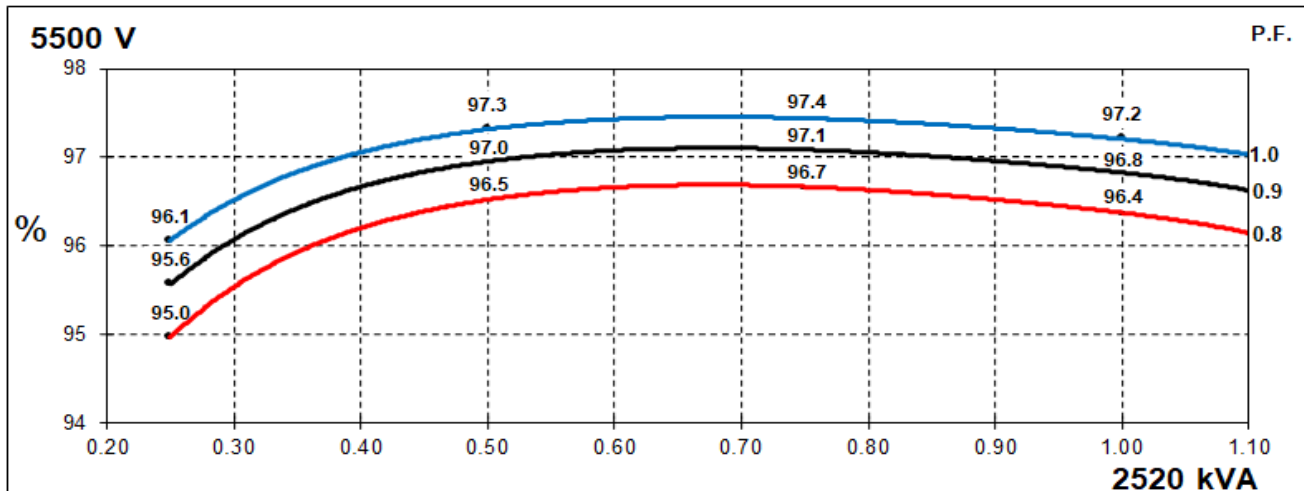


STAMFORD


S9H1D-C4 Wdg.63

Locked Rotor Motor Starting Curves - Separately Excited

50Hz

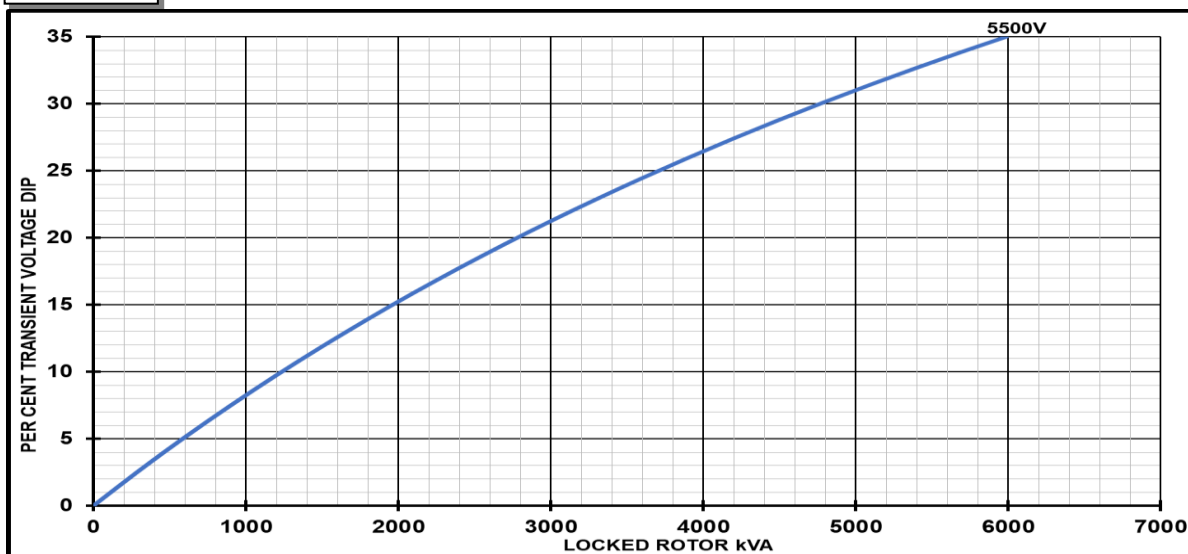

60Hz

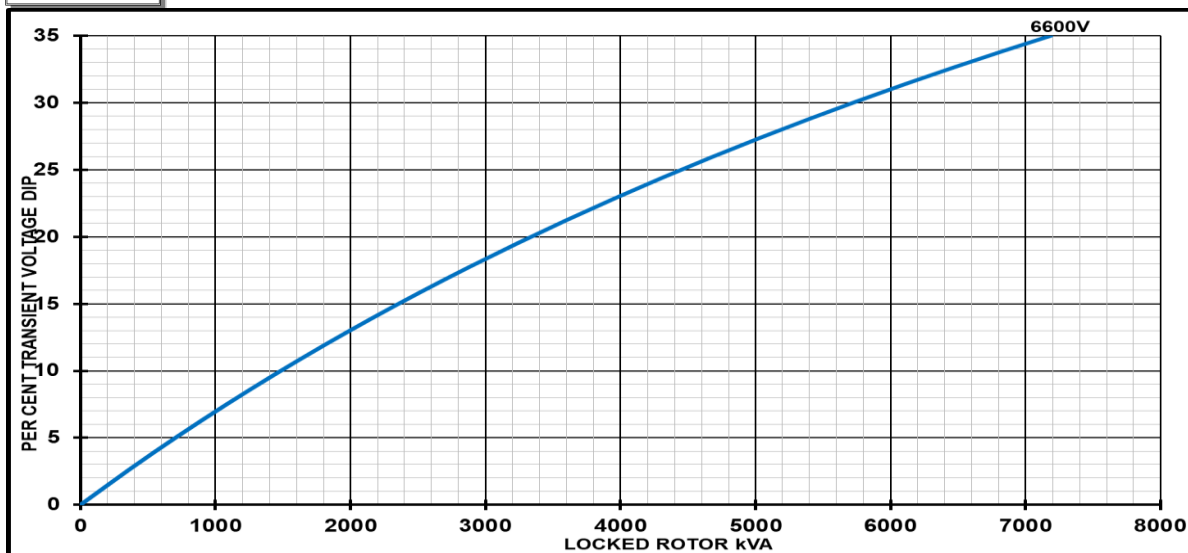

Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor	
Lagging PF	Scaling Factor	Lagging PF	Scaling Factor
<= 0.4	1.00	<= 0.4	1.25
0.5	0.95	0.5	1.20
0.6	0.90	0.6	1.15
0.7	0.86	0.7	1.10
0.8	0.83	> 0.7	1.00
0.9	0.75		
0.95	0.70		
1	0.65		


Note: To determine % Transient Voltage Dip or Voltage Rise at various PF, multiply the % Voltage Dip from the curve directly by the Scaling Factor.

STAMFORD®

S9H1D-C4 Wdg.63


Three-phase Short Circuit Decrement Curve - Separately Excited

50Hz

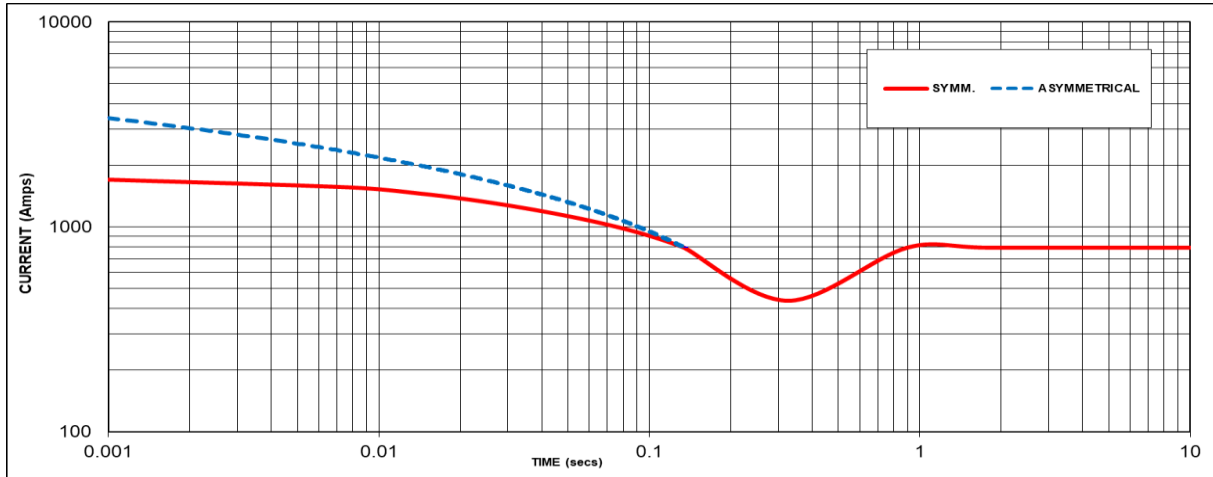

Sustained Short Circuit = 794 Amps

60Hz

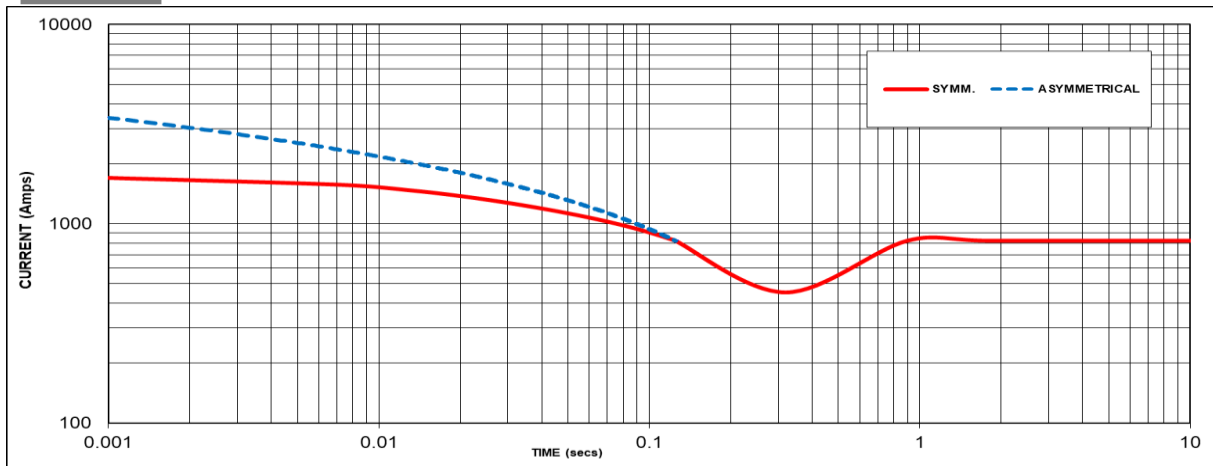

Sustained Short Circuit = 824 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
5500V	X 1.00	6600V	X 1.00
-	-	-	-
-	-	-	-
-	-	-	-

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

Note 3

All other times are unchanged

Curves are drawn for Star connections under no-load excitation at rated speeds. For other connection (where applicable) the following multipliers should be applied to current values as shown :

Parallel Star = Curve current value X 2


Series Delta = Curve current value X 1.732

STAMFORD


S9H1D-C4 Wdg.63

Typical Alternator Operating Charts

5500V/50Hz

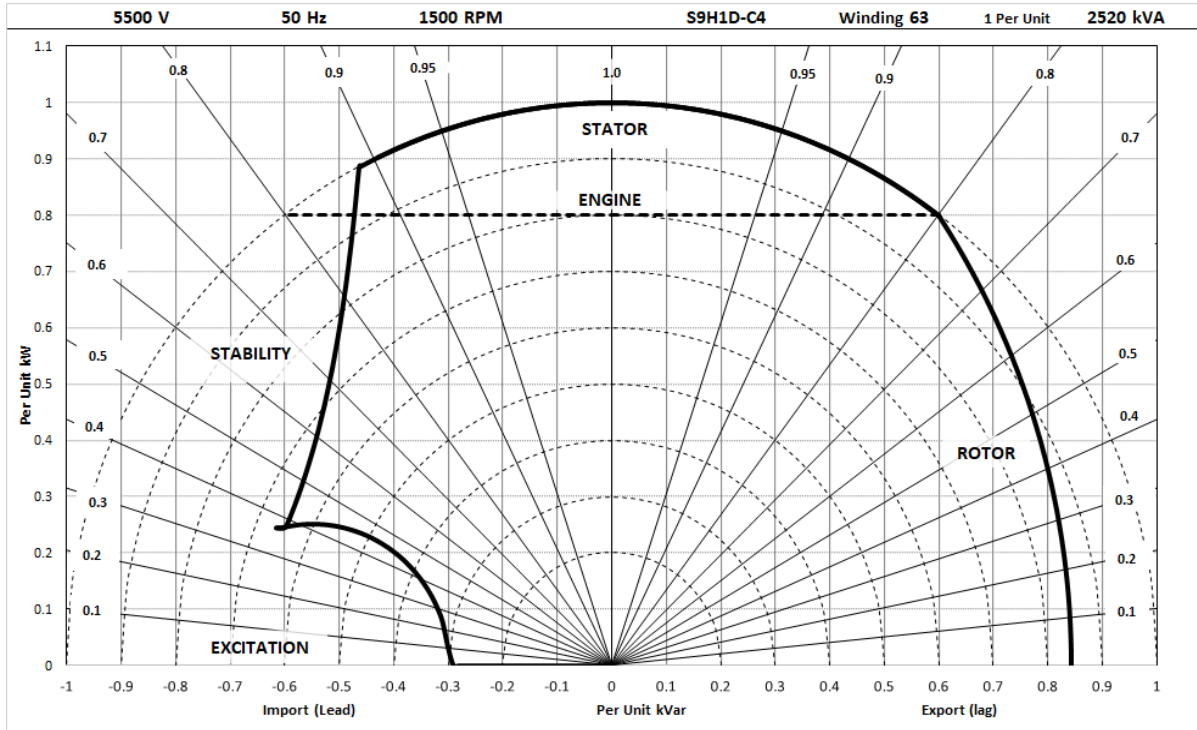

6600V/60Hz

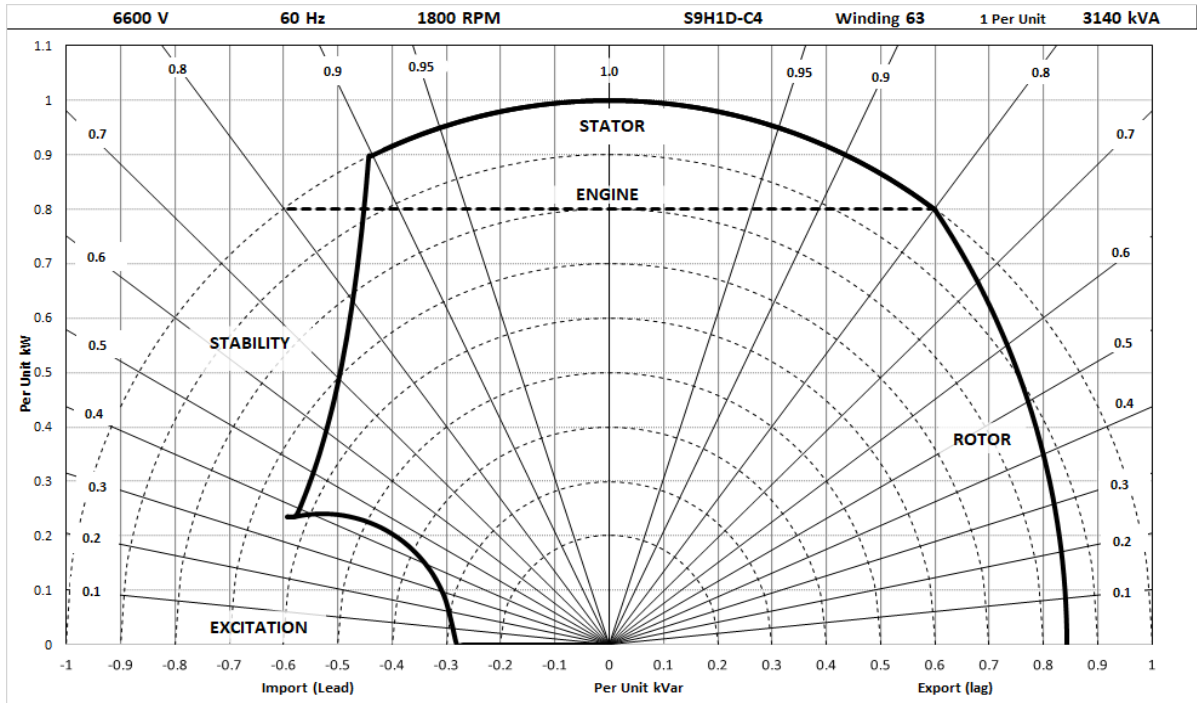

STAMFORD®

S9H1D-C4 Wdg.63

RATINGS AT 0.8 POWER FACTOR

Class - Temp Rise		Standby - 163/27°C	Standby - 150/40°C	Cont. H - 125/40°C	Cont. F - 105/40°C
50 Hz	Star (V)	5500	5500	5500	5500
	Parallel Star (V)	N/A	N/A	N/A	N/A
	Delta (V)	N/A	N/A	N/A	N/A
	kVA	2772	2696	2520	2318
	kW	2218	2157	2016	1855
	Efficiency (%)	96.2	96.2	96.4	96.5
	kW Input	2306	2241	2092	1922

60 Hz	Star (V)	6600	6600	6600	6600
	Parallel Star (V)	N/A	N/A	N/A	N/A
	Delta (V)	N/A	N/A	N/A	N/A
	kVA	3454	3360	3140	2889
	kW	2763	2688	2512	2311
	Efficiency (%)	96.3	96.4	96.5	96.5
	kW Input	2869	2789	2604	2394

De-rates

All values tabulated above are subject to the following reductions:

- 5% when air inlet filters are fitted
- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C @ Class H temperature rise (please refer to applications for ambient temperature de-rates at other temperature rise classes)
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters (for <690V) or 1500 meters (for >690V) must be referred to applications.

Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

Note: Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at youtube.com/stamfordavk

stamford-avk.com

For Applications Support:
applications@cummins.com

For Customer Service:
emea.service@cummins.com

For General Enquiries:
Stamford-avk@cummins.com

Copyright 2020. Cummins Generator Technologies Ltd. All rights reserved.
Cummins and the Cummins logo are registered trade marks of Cummins Inc.
STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.

